


## MAFAC JAVA

### Technical specifications

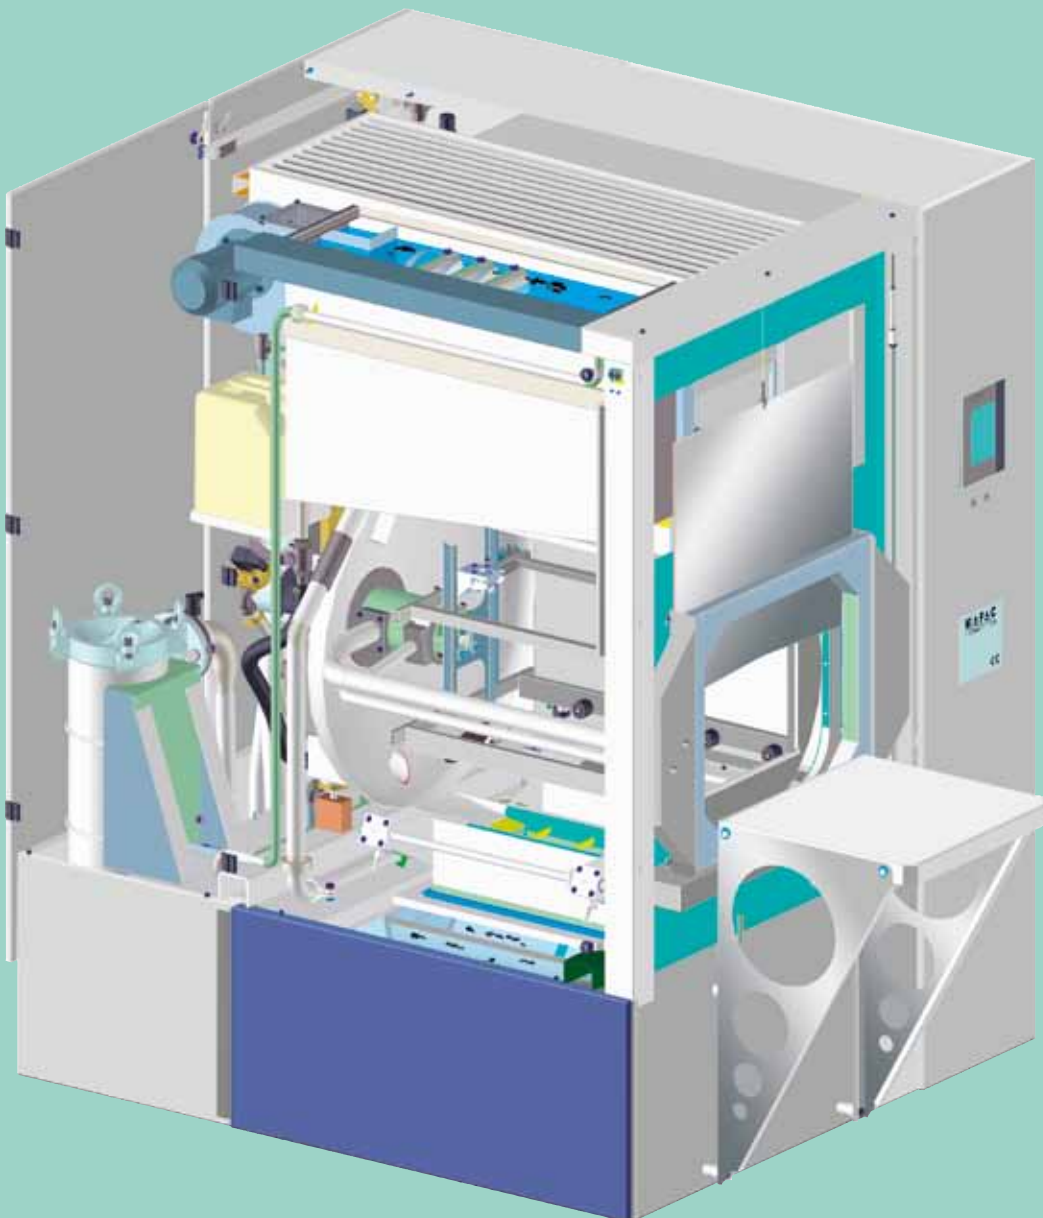

#### Benefits for the user:

- Patented rotating multi-side spray system with counter-rotating basket pickup system (can be switched off). With specifically arranged nozzles for reliable cleaning results.
- Two or three large-capacity tanks for long life of the process water.
- Cascade design of tanks for extended life of media.
- Reduced energy consumption thanks to insulated tanks.
- Separate heating of tanks.
- Removable swarf filter trays for collecting coarse dirt particles in the return flow from the cleaning/rinsing process.
- Coalescing oil separation system with integrated surface suction device in tank 1 and high-level monitoring of the oil collection tank.
- Floodable cleaning chamber (50% of batch height).
- Steam extraction with mist collector, return of condensation and condensate.
- Vertical sliding door and loading table with drip tray as a versatile load/unload platform. After the end of the cleaning process, automatic opening of the sliding door is possible.
- Easy-to-use MAFAC MAVIATIC touch panel.
- Ultrasonic cleaning system incl. parabolic reflector for optimum efficiency of the ultrasonic waves.
- The hot air pulse blowing system keeps residual water to a minimum for a higher degree of dryness in the parts.


**Standard features:**

- Innovative machine design for quick maintenance and easy servicing
- Front loading with automatically unlocking sliding door
- EURO standard baskets can be used (600 x 400 x 288)
- Swarf filtration in return flow
- Liquid heating system with analogue temperature control and cut-off
- Thermal insulation of tanks
- Steam extraction with condensation and mist separator
- Coalescing oil separator with high-level monitoring of the oil collection tank
- Media fill level control
- Water-contact components made of stainless steel / plastic
- One large 705 litres tank
- Spray-flood cleaning with batch 50% floodable
- Easy-to-use MAFAC MAVIATIC 6 inch touch panel

**Options:**

- Additional spray process with tank 2
- Working chamber size adjustable to max. 660L x 480W x 338H (mm)
- Modem for remote maintenance of the control system
- Rotating hot air pulse blowing system
- Stationary hot air drying system
- Combined rotating hot air pulse blowing and hot air drying system
- Vacuum drying\*
- Ultra-fine filtration on pressure side of pump
- Ultrasonic cleaning unit
- Viewing window with internal light
- Speed control for basket rotation including oscillation
- Program package for time control and media treatment
- Enhanced pump system for tank 1
- Bund tray acc. to German Water Resources Act
- Draining pump
- Dosing of chemicals
- DI unit
- Charging trolley
- Stationary roller conveyor, all castors with ball bearings
- Automatic transfer system
- User-friendly MAFAC MAVIATIC touch panel, 12 inch, with graphic visualization of the process
- Speed control with nozzle rotation
- Frequency-controlled pump pressure
- Rinse water treatment module

Spraying pressure pump standard version			Return filtration		Option: Pre-run filtration	
Flow volume	Pressure	Output	Grade	Surface area	Grade	Surface area
<b>Cleaning process tank 1:</b>						
335 l/min.	4.5 bar	4.0 kW	150 µm	0.56 m <sup>2</sup>	100 µm	1x 0.48 m <sup>2</sup>
<b>Rinsing process tank 2:</b>						
300 l/min.	2.5 bar	1.85 kW	150 µm	0.28 m <sup>2</sup>	50 µm	1x 0.24 m <sup>2</sup>
Option: Spraying pressure pump non-performance version			Return filtration		Option: Pre-run filtration	
Flow volume	Pressure	Output	Grade	Surface area	Grade	Surface area
<b>Cleaning process tank 1:</b>						
370 l/min.	7.5 bar	7.5 kW	150 µm	0.56 m <sup>2</sup>	100 µm	2x 0.48 m <sup>2</sup>
			Contents	Heating time	Temperature	Heating capacity
<b>1-bath version</b>	<b>Tank 1, cleaning:</b>		730 litres	approx. 2.0 h	[75 °C]	30.0 kW
<b>2-baths version</b>	<b>Tank 1, cleaning:</b>		460 litres	approx. 2.0 h	[75 °C]	15.0 kW
	<b>Tank 2, rinsing:</b>		270 litres	approx. 2.0 h	[75 °C]	15.0 kW
<b>Connections:</b>			Electrical	V PH: Hz ; kVA	400 ; 3 ; 50 ; 45	
			Compressed air	inch; bar	Rp ¾ ; 5 – 8	
			Fresh water	inch; bar	Rp ¾ ; 0.5 – 10	
			Waste water	inch	Rp 1½	
			Exhaust air	mm	DN 120	
<b>Extraction/condensation:</b>			Mean volumetric flow rate		600 m <sup>3</sup> /h	
<b>Ultrasonic cleaning unit</b>			Frequency	25 kHz	Output	2 x 1,500
				25 kHz		2 x 2,000 W
				40 kHz		2 x 1,000 W
<b>Drying systems:</b>				Flow volume	Pressure	Temperature
			Pulse blowing system	approx. 3,100 l/min.	6.0 bar	45 °C
			Hot-blowing system	250 m <sup>3</sup> /h	0.015 bar	max 90 °C
			Combined pulse/hot blowing system	180 m <sup>3</sup> /h	0.015 bar	max. 100 °C
			Vacuum drying system	300 m <sup>3</sup> /h	20 mbar	
<b>Dimensions:</b>				Depth (mm)	Width (mm)	Height (mm)
			Usable space max.	660	480	338
			External dimensions	1700	1500	2050
			Loading height			860
<b>Weight:</b>			Batch		max. 100 kg	Option max.250 kg
			Machine	without liquid	1300 kg	
				with liquid	2050 kg	
<b>Machine colour:</b>				Light grey	Brilliant blue	
				RAL 7035	RAL 5007	

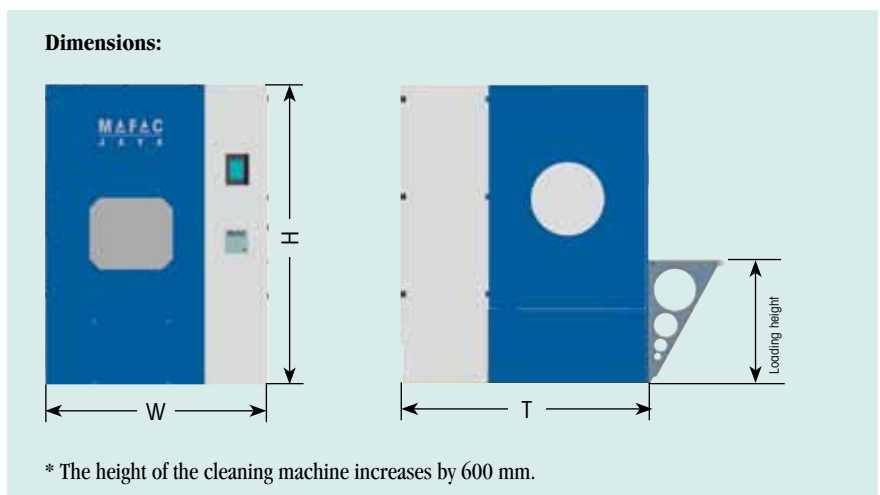

Parts Cleaning. Systems and Solutions.

Ernst Schwarz GmbH & Co. KG Maschinenfabrik  
 Max-Eyth-Straße 2, D-72275 Alpirsbach  
 Phone + 49 (0) 74 44 / 95 09-0, Fax 95 09 - 99  
 E-mail: info@mafac.de, www.mafac.de

**North American Partner**  
**JAYCO Cleaning Technologies**

8216 Princeton Glendale Road Suite 201  
 West Chester, OH 45069 USA  
 Tel.: (513) 737-9600  
 Fax: (513) 892-3938  
 Email: jayco@jaycoclean.com  
 www.jaycoclean.com